

Product Overview

The NCA1051A is a high-speed CAN transceiver that provides an interface between a Controller Area Network (CAN) protocol controller and the physical two-wire CAN bus. The NCA1051A implements the CAN physical layer as defined in ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5. This implementation enables reliable communication in the CAN FD fast phase at data rates up to 5 Mbit/s. The NCA1051A provides thermal protection and transmit data dominant time out function.

Key Features

- Fully compatible with the ISO11898-2 standard
- Ideal passive behavior to the CAN bus when the supply voltage is off
- I/O voltage range supports 3.3V and 5V MCU
- Power supply voltage
- V_{IO} : 2.8V to 5.5V
- V_{CC} : 4.5V to 5.5V
- Bus fault protection of -70V to +70V
- Bus common-mode voltage of -30V to +30V
- Transmit data (TXD) dominant time out function
- Over current and over temperature protection
- Date rate: up to 5Mbps
- Low loop delay: <250ns
- Operation temperature: -40°C to +125°C
- RoHS & REACH compliant

Applications

- CAN bus standards such as CANopen, DeviceNet, NMEA2000, ARNIC825, ISO11783 and CANaerospace
- Highly loaded CAN networks down to 10 kbps networks using TXD DTO
- Industrial automation, control, sensors, and drive systems
- Building, security, and climate control automation

Device Information

Part Number	Package	Body Size
NCA1051A-DSPR	SOP8	4.90mm × 3.90mm
NCA1051AN-DSPR	SOP8	4.90mm × 3.90mm

Functional Block Diagrams

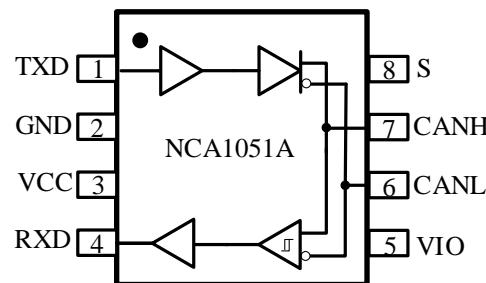


Figure 1. NCA1051A Block Diagram

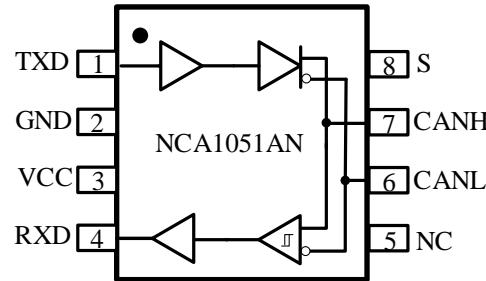


Figure 2. NCA1051AN Block Diagram

Index

1. PIN CONFIGURATION AND FUNCTIONS	3
2. ABSOLUTE MAXIMUM RATINGS	3
3. ESD RATINGS (ELECTROSTATIC DISCHARGE PROTECTION)	4
4. RECOMMENDED OPERATING CONDITIONS.....	4
5. THERMAL CHARACTERISTICS	4
6. SPECIFICATIONS	5
6.1. ELECTRICAL CHARACTERISTICS	5
6.2. SWITCHING ELECTRICAL CHARACTERISTICS.....	8
6.3. PARAMETER MEASUREMENT INFORMATION.....	9
6.4. TYPICAL CHARACTERISTICS	12
7. FUNCTION DESCRIPTION	13
7.1. OVERVIEW.....	13
7.2. FUNCTIONAL BLOCK DIAGRAM.....	13
7.3. FEATURE DESCRIPTION	13
7.3.1. <i>TXD Dominant Time-Out Function (TXD DTO)</i>	13
7.3.2. <i>Undervoltage Detection on Pins VCC and VIO.</i>	14
7.3.3. <i>Unpowered Device.....</i>	14
7.3.4. <i>Internal Biasing of TXD and S Input Pins</i>	14
7.3.5. <i>Over-Temperature Protection (OTP).....</i>	14
7.3.6. <i>Over-Current Protection (OCP)</i>	14
7.4. VIO SUPPLY PIN	14
7.5. DEVICE FUNCTIONAL MODES.....	15
7.5.1. <i>CAN Bus States</i>	15
7.5.2. <i>Normal Mode.....</i>	15
7.5.3. <i>Silent Mode.....</i>	15
7.5.4. <i>Driver and Receiver Function Tables</i>	16
8. APPLICATION INFORMATION	17
8.1. TYPICAL APPLICATION	17
9. PACKAGE INFORMATION	18
10. ORDER INFORMATION	18
11. DOCUMENTATION SUPPORT.....	18
12. TAPE AND REEL INFORMATION.....	19
13. REVISION HISTORY	20

1. Pin Configuration and Functions

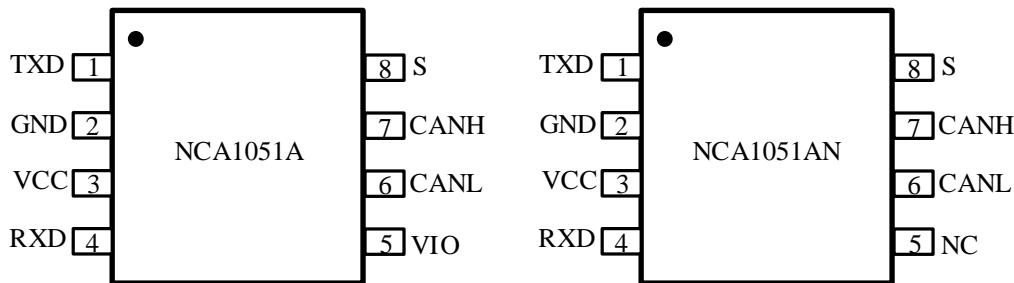


Figure 1-1 NCA1051A, NCA1051AN Package

Table 1-1 NCA1051A Pin Configuration and Description

NCA1051A	NCA1051AN	SYMBOL	FUNCTION
PIN NO.	PIN NO.		
1	1	TXD	CAN transmit data input (LOW for dominant and HIGH for recessive bus states)
2	2	GND	Ground
3	3	VCC	Power Supply
4	4	RXD	CAN receive data output (LOW for dominant and HIGH for recessive bus states)
5	\	VIO	Logic I/O supply voltage
\	5	NC	Not connected
6	6	CANL	Low-level CAN bus line
7	7	CANH	High-level CAN bus line
8	8	S	S (silent mode) select pin (active high)

2. Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)^{[1][2]}.

Parameters	Symbol	Min	Typ	Max	Unit	Comments
Power Supply Voltage	VCC, VIO	-0.3		7	V	
Logic I/O Voltage	TXD, RXD, S	-0.3		7	V	
Maximum bus Pin Voltage	V _{CANH} , V _{CANL}	-70		70	V	
Voltage between pin CANH and pin CANL	V _{CANH} - V _{CANL}	-70		70	V	
Junction temperature	T _J	-40		150	°C	

Storage Temperature	T_{stg}	-65		150	°C	
---------------------	-----------	-----	--	-----	----	--

[¹] Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to Absolute Maximum Rating condition for extended periods may affect device reliability.

[²] All voltage values, except for “Voltage between pin CANH and pin CANL”, are with respect to GND terminal.

3. ESD Ratings (Electrostatic Discharge Protection)

Parameters		Conditions	Value	Unit	Comments
HBM	Human Body Model	CANH and CANL	±8	kV	According to ANSI/ESDA/ JEDEC JS-001
		Other pins	±8	kV	According to ANSI/ESDA/ JEDEC JS-001
CDM	Charged Device Model	All pins	±2	kV	According to ANSI/ESDA/ JEDEC JS-002
MM	Machine Model	All pins	±600	V	According to JESD22-A115C

4. Recommended Operating Conditions

Parameters	Symbol	Min	Typ	Max	Unit
Power Supply Voltage	VCC	4.5	5	5.5	V
I/O Level-Shifting Voltage	VIO	2.8	3.3	5.5	V
Operating Temperature	T_{opr}	-40		125	°C

5. Thermal Characteristics

Parameters	Symbol	SOP8	Unit
IC Junction-to-Air Thermal Resistance	$R_{\theta JA}$	145	°C/W
Junction-to-case (top) thermal resistance	$R_{\theta JC(\text{top})}$	50	°C/W
Junction-to-board thermal resistance	$R_{\theta JB}$	45	°C/W

6. Specifications

6.1. Electrical Characteristics

V_{CC} =4.5V to 5.5V, V_{IO} =2.8 to 5.5V^[1], T_a =-40°C to 125°C. Unless otherwise noted, Typical values are at V_{CC} =5V, V_{IO} =3.3V, T_a = 25°C.

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
Supply; pin VCC						
V_{CC}	Supply voltage		4.5	-	5.5	V
I_{CC}	Supply current	Normal mode, recessive, $V_{TXD}=V_{IO}$ ^[2] , $V_S=0V$	2.5	3.5	10	mA
		Normal mode, dominant, $V_{TXD}=0V$	20	40	70	mA
		Normal mode, dominant, $V_{TXD}=0$, short circuit on bus lines, $-3V < (V_{CANH} - V_{CANL}) < 18V$	2.5	56	110	mA
		Silent mode, $V_{TXD}=V_{IO}$ ^[2]	0.1	1.95	2.5	mA
$V_{UVd(VCC)}$	Undervoltage detection voltage on pin VCC	Rising	3.5	4.15	4.5	V
		Falling	3.5	4.05	4.5	V
I/O level adapter supply; pin V_{IO}; only for NCA1051A						
V_{IO}	Supply voltage on pin V _{IO}		2.8	-	5.5	V
I_{IO}	Supply current on pin V _{IO}	Normal/ silent mode, recessive, $V_{TXD}=V_{IO}$	2	14	200	uA
		Normal mode, dominant, $V_{TXD}=0V$	-	175	1000	uA
$V_{UVd(VIO)}$	Undervoltage detection voltage on pin V _{IO}	Rising	1.3	2.1	2.7	V
		Falling	1.3	2.0	2.7	V
Silent mode control input; pin S						
V_{IH}	High level input voltage		$0.7*V_{IO}$ ^[2]	-	$V_{IO}+0.3$ ^[2]	V
V_{IL}	Low level input voltage		-0.3	-	$0.3*V_{IO}$ ^[2]	V
I_{IH}	High level input current	$V_S=V_{IO}$ ^[2]	1	4.5	10	uA
I_{IL}	Low level input current	$V_S=0V$	-1	-	1	uA
CAN transmit data input; pin TXD						
V_{IH}	High level input voltage		$0.7*V_{IO}$ ^[2]	-	$V_{IO}+0.3$ ^[2]	V
V_{IL}	Low level input voltage		-0.3	-	$0.3*V_{IO}$ ^[2]	V
I_{IH}	High level input current	$V_{TXD}=V_{IO}$ ^[2]	-5	-	5	uA

I_{IL}	Low level input current	$V_{TXD}=0V$	-260	-150	-30	uA
C_i	Input capacitance	[3]	-	5	10	pF
<i>CAN receive data output; pin RXD</i>						
I_{OH}	High level output current	$V_{RXD} = V_{IO} - 0.4V$ [2]	-8	-3	-1	mA
I_{OL}	Low level output current	$V_{RXD} = 0.4V$; bus dominant	2	5	12	mA
<i>Bus lines; pins CANH and CANL; Driver</i>						
$V_{OH(D)}$	CANH output voltage (Dominant)	$V_{TXD} = 0V$, $R_L = 50\Omega$ to 65Ω	2.75	3.4	4.5	V
$V_{OL(D)}$	CANL output voltage (Dominant)	$V_{TXD} = 0V$, $R_L = 50\Omega$ to 65Ω	0.5	1.2	2.25	V
$V_{OH(R)}$	CANH output voltage (Recessive)	Normal/ silent mode, no load	2	0.5^*V_{CC}	3	V
$V_{OL(R)}$	CANL output voltage (Recessive)	Normal/ silent mode, no load	2	0.5^*V_{CC}	3	V
$V_{OD(D)}$	Differential output voltage (Dominant)	Normal mode				
		$R_L = 45\Omega$ to 65Ω	1.5	-	3	V
		$R_L = 45\Omega$ to 70Ω	1.5	-	3.3	V
		$R_L = 2240\Omega$	1.5	-	5	V
$V_{OD(R)}$	Differential output voltage (Recessive)	Normal mode, no load	-50	-	50	mV
V_{TXSym}	Transmitter voltage symmetry	$V_{TXSym} = V_{CANH} + V_{CANL}$, [3] $f_{TXD} = 1MHz$, $R_L = 60\Omega$, $C_{SPLIT} = 4.7nF$, $V_{CC} = 4.75V$ to $5.25V$ [4]	0.9^*V_{CC}	-	1.1^*V_{CC}	V
$I_{OSH(R)}$	CANH short-circuit output current, recessive	Normal mode, $V_{CANH} = V_{CANL} = -27V$ to $32V$	-5	-	5	mA
$I_{OSL(R)}$	CANL short-circuit output current, recessive	Normal mode, $V_{CANH} = V_{CANL} = -27V$ to $32V$	-5	-	5	mA
$I_{OSH(D)}$	CANH short-circuit output current, dominant	Normal mode, $V_{CANH} = -15V$ to $18V$, CANL open	-115	-70	115	mA
$I_{OSL(D)}$	CANL short-circuit output current, dominant	Normal mode, $V_{CANL} = -15V$ to $18V$, CANH open	-115	70	115	mA
<i>Bus lines; pins CANH and CANL; Receiver</i>						
$V_{ID(R)}$	Differential input threshold voltage, recessive	Normal/ silent mode $-12V < V_{CANH} < 12V$,	0.5	0.7	0.9	V

		-12V < V _{CANL} < 12V				
V _{ID(D)}	Differential input threshold voltage, dominant	Normal/ silent mode -12V < V _{CANH} < 12V, -12V < V _{CANL} < 12V	0.5	0.8	0.9	V
V _{hys}	Differential input hysteresis voltage	Normal/ silent mode -12V < V _{CANH} < 12V, -12V < V _{CANL} < 12V	50	80	200	mV
V _{RX(R)}	Receiver recessive voltage	Normal/ silent mode -12V < V _{CANH} < 12V, -12V < V _{CANL} < 12V	-4	-	0.5	V
V _{RX(D)}	Receiver dominant voltage	Normal/ silent mode -12V < V _{CANH} < 12V, -12V < V _{CANL} < 12V	0.9	-	9	V
I _{LKG(OFF)}	Power-off (unpowered) bus input leakage current	V _{CANH} = V _{CANL} = 5V, V _{CC} = V _{IO} = 0V ^[2]	-5	-	5	uA
R _I	Input resistance	-2V ≤ V _{CANH} ≤ 7V, -2V ≤ V _{CANL} ≤ 7V ^[3]	9	16	28	kΩ
R _{I(match)}	Input resistance matching	V _{CANH} = 5V, V _{CANL} = 5V, R _{I(match)} =2*(R _{CANH} -R _{CANL})/(R _{CANH} +R _{CANL}) ^[3]	-1	-	1	%
R _{ID}	Differential input resistance	-2V ≤ V _{CANH} ≤ 7V, -2V ≤ V _{CANL} ≤ 7V, R _{ID} =R _{CANH} +R _{CANL} ^[3]	19	33	52	kΩ
C _I	Input capacitance to ground	CANH or CANL ^[3]	-	13	-	pF
C _{ID}	Differential input	^[3]	-	5	-	pF
Temperature detection						
T _{SD}	Thermal shutdown threshold	^[3]	-	193	-	°C
T _{SD(hys)}	Thermal shutdown hysteresis	^[3]	-	11	-	°C

^[1] Only NCA1051A has a VIO pin. For NCA1051AN, the VIO input is internally connected to VCC.

^[2] V_{IO}=V_{CC} for the version without VIO pin.

^[3] Not tested in production; guaranteed by design.

^[4] The test circuit used to measure the bus output voltage symmetry (which includes C_{SPLIT}) is shown in Figure 6-1, Figure 6-3.

6.2. Switching Electrical Characteristics

$V_{CC} = 4.5V \sim 5.5V$, $V_{IO} = 2.8 \sim 5.5V$, $T_a = -40^\circ C$ to $125^\circ C$. Unless otherwise noted, Typical values are at $V_{CC} = 5V$, $V_{IO} = 3.3V$, $T_a = 25^\circ C$

Symbol	Parameters	Comments	Min	Typ	Max	Unit
Driver						
$t_{d(TXD\text{-bus}, \text{dom})}$	Delay time from TXD to bus dominant	Normal mode	-	40	-	ns
$t_{d(TXD\text{-bus}, \text{rec})}$	Delay time from TXD to bus recessive	Normal mode	-	60	-	ns
$t_{r(\text{bus})}$	Differential output signal rise time		-	45	-	ns
$t_{f(\text{bus})}$	Differential output signal fall time		-	30	-	ns
$t_{bit(\text{bus})}$	Transmitted recessive bit width	$t_{bit(TXD)} = 500$ ns	435	495	530	ns
		$t_{bit(TXD)} = 200$ ns	155	195	210	ns
t_{TXD_DTO}	TXD dominant time-out time		0.8	2.2	5	ms
Receiver						
$t_{d(\text{bus-RXD}, \text{dom})}$	Delay time from bus to RXD dominant	Normal/ silent mode	-	40	-	ns
$t_{d(\text{bus-RXD}, \text{rec})}$	Delay time from bus to RXD recessive	Normal/ silent mode	-	35	-	ns
$t_{d(TXD\text{-RXD}, \text{dom})}$	Delay time from TXD to RXD dominant	Normal mode	-	80	220	ns
$t_{d(TXD\text{-RXD}, \text{rec})}$	Delay time from TXD to RXD recessive	Normal mode	-	95	220	ns
$t_{r(\text{RXD})}$	RXD signal rise time		-	5	-	ns
$t_{f(\text{RXD})}$	RXD signal fall time		-	5	-	ns
$t_{bit(\text{RXD})}$	Bit time on pin RXD	$t_{bit(TXD)} = 500$ ns	400	490	550	ns
		$t_{bit(TXD)} = 200$ ns	120	190	220	ns
Δt_{rec}	Receiver timing symmetry	Distortion of RXD relative to bus				
		$t_{bit(TXD)} = 500$ ns	-65	-35	40	ns
		$t_{bit(TXD)} = 200$ ns	-45	-20	15	ns

6.3. Parameter Measurement Information

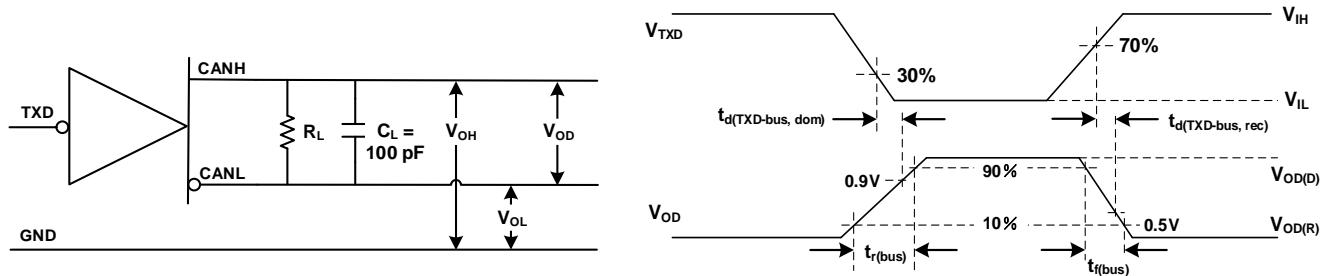


Figure 6-1 Driver Test Circuit and Voltage Waveforms

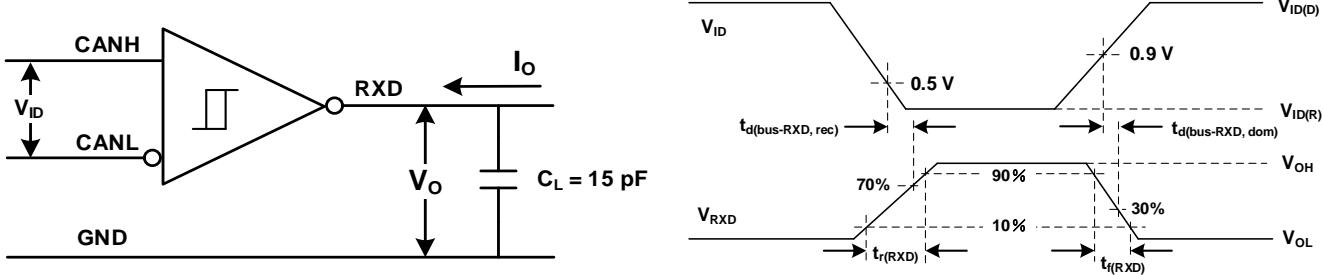


Figure 6-2 Receiver Test Circuit and Voltage Waveforms

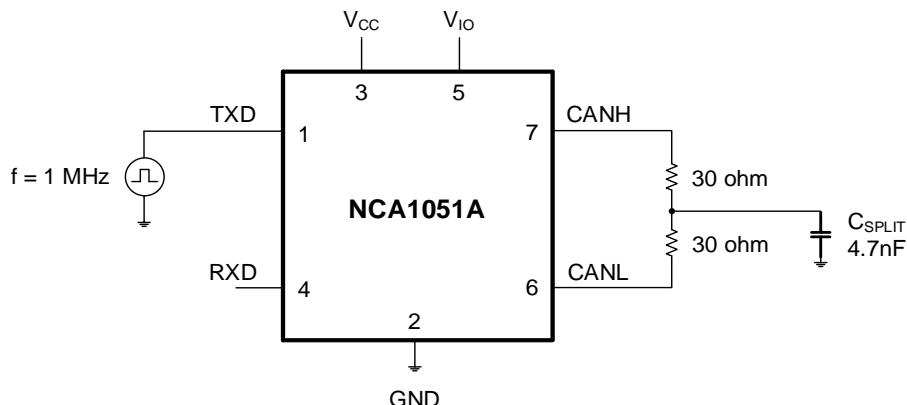


Figure 6-3 Transceiver Driver Symmetry Test Circuit

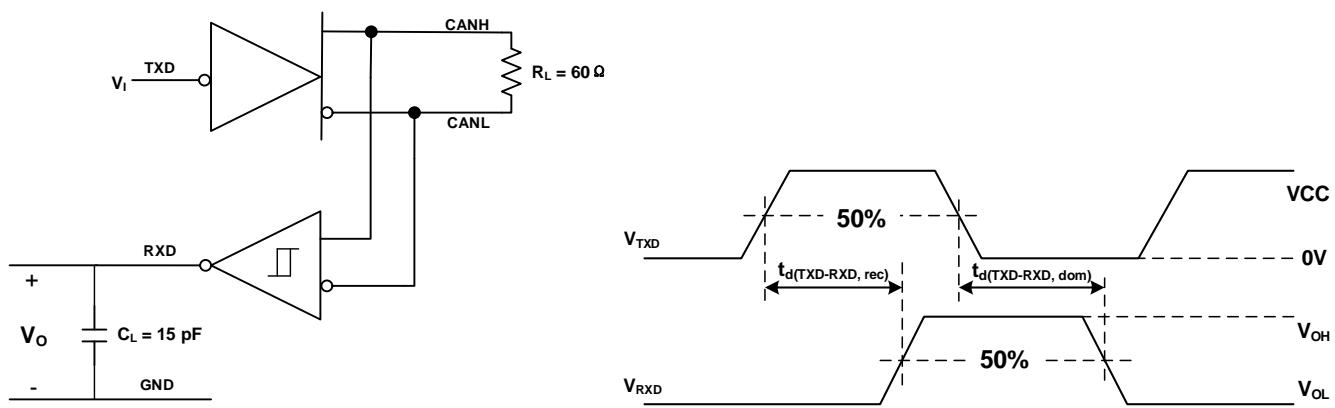


Figure 6-4 Loop Time Test Circuit and Voltage Waveforms

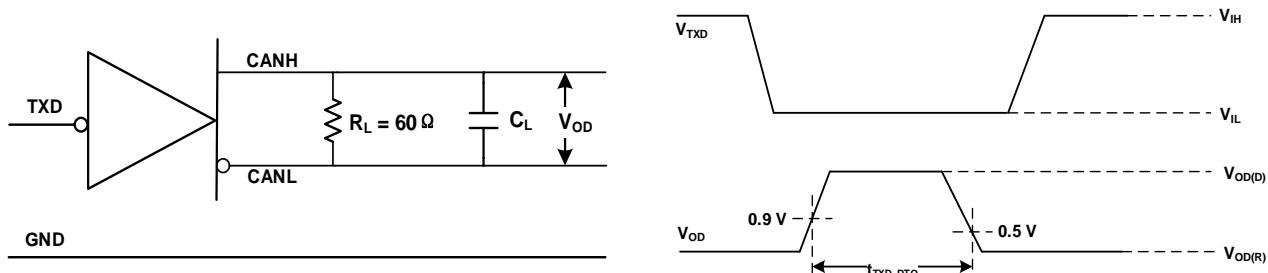


Figure 6-5 TxD Dominant Time-out Test Circuit and Voltage Waveforms

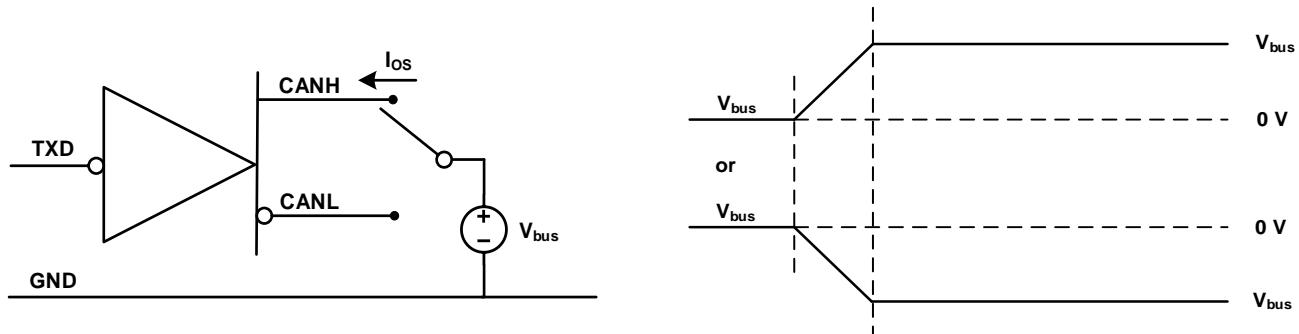
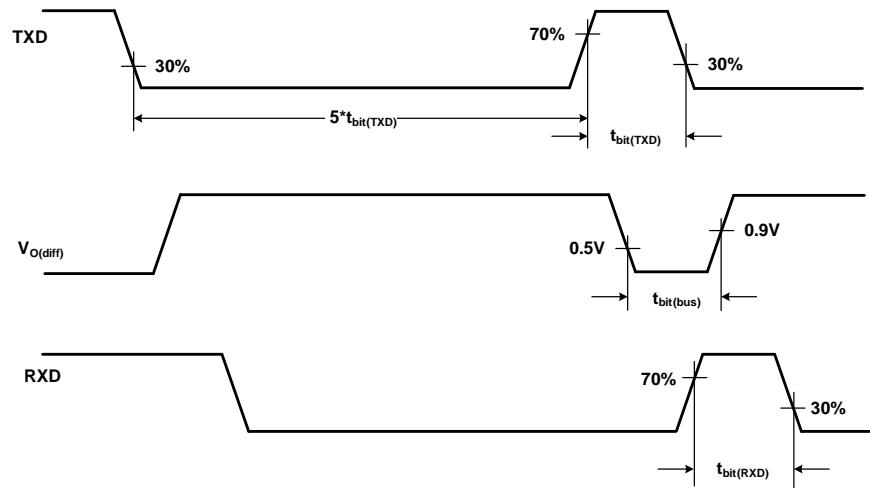
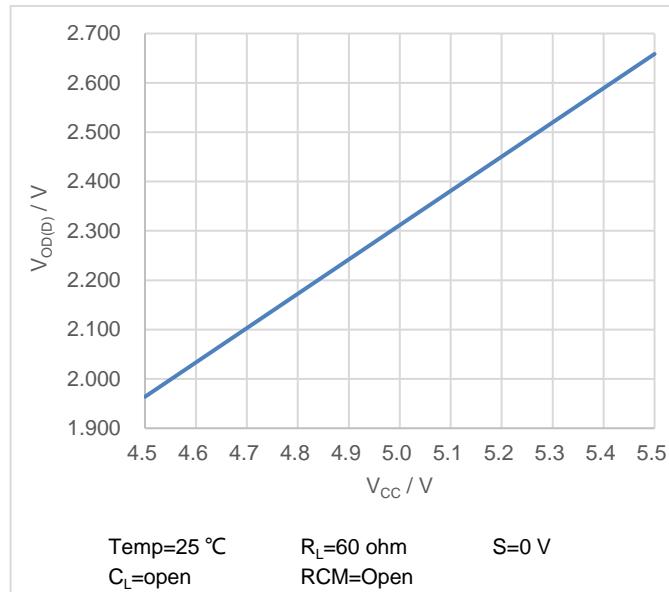
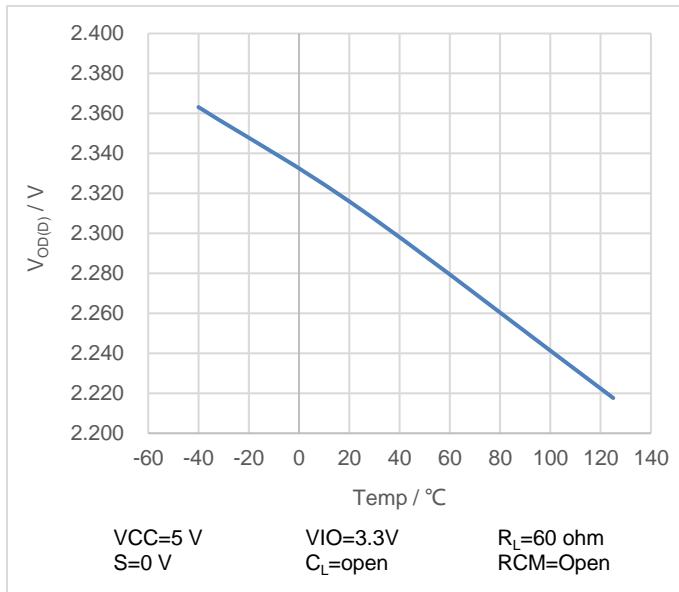
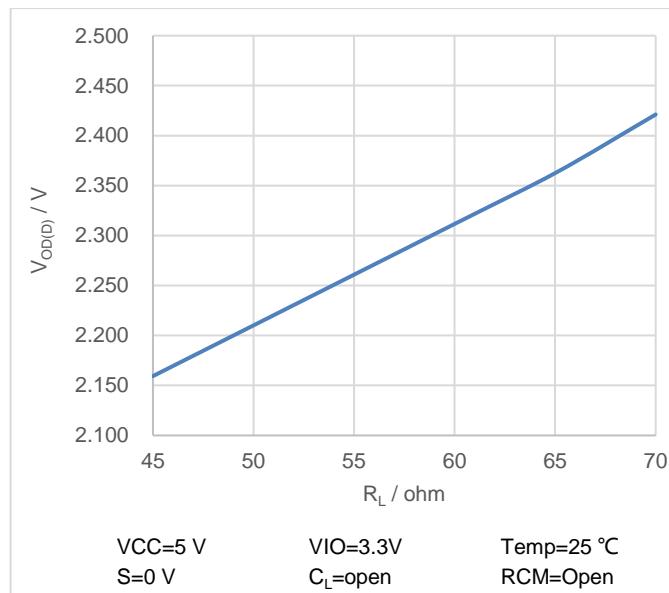
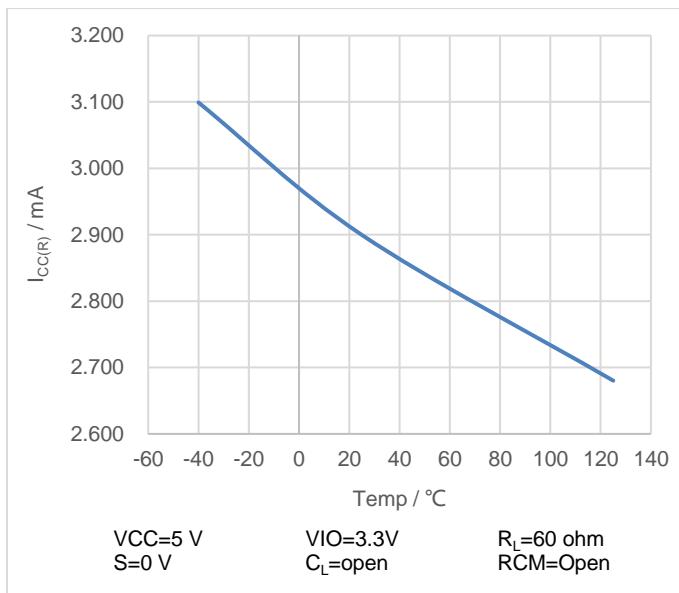


Figure 6-6 Driver Short-Circuit Current Test Circuit and Waveforms

Figure 6-7 $t_{bit(RXD)}$ Test Circuit and Waveforms

6.4. Typical Characteristics

$V_{CC} = 4.5V \sim 5.5V$, $V_{IO} = 2.8V \sim 5.5V$, $R_L = 45\Omega \sim 70\Omega$, $T_a = -40^\circ C$ to $125^\circ C$. Unless otherwise noted, Typical values are at $V_{CC} = 5V$, $V_{IO} = 3.3V$, $R_L = 60\Omega$, $T_a = 25^\circ C$.

Figure 6-8 $V_{OD(D)}$ vs V_{CC} Figure 6-10 $V_{OD(D)}$ vs TemperatureFigure 6-9 $V_{OD(D)}$ vs R_L Figure 6-11 $I_{CC(R)}$ vs Temperature

7. Function Description

7.1. Overview

The NCA1051A is a CAN transceiver which is fully compatible with the ISO11898-2 standard. The data rate of the NCA1051A is up to 5Mbps, and it can support up to 110 CAN nodes. Meanwhile, the maximum transmission rate of the CAN bus is limited by the bus load, the quantity of nodes, the cable length, and other factors. The NCA1051A has a $\pm 30V$ input common-mode range, enabling reliable communication between bus nodes with large ground potential deviations.

Comprehensive protection features are designed to enhance the device and network robustness in harsh operating conditions. The transmit data dominant time-out function prevents the bus from lock-up by the faults on micro-controller. Moreover, the NCA1051A provides thermal protection and short-circuit protection.

7.2. Functional Block Diagram

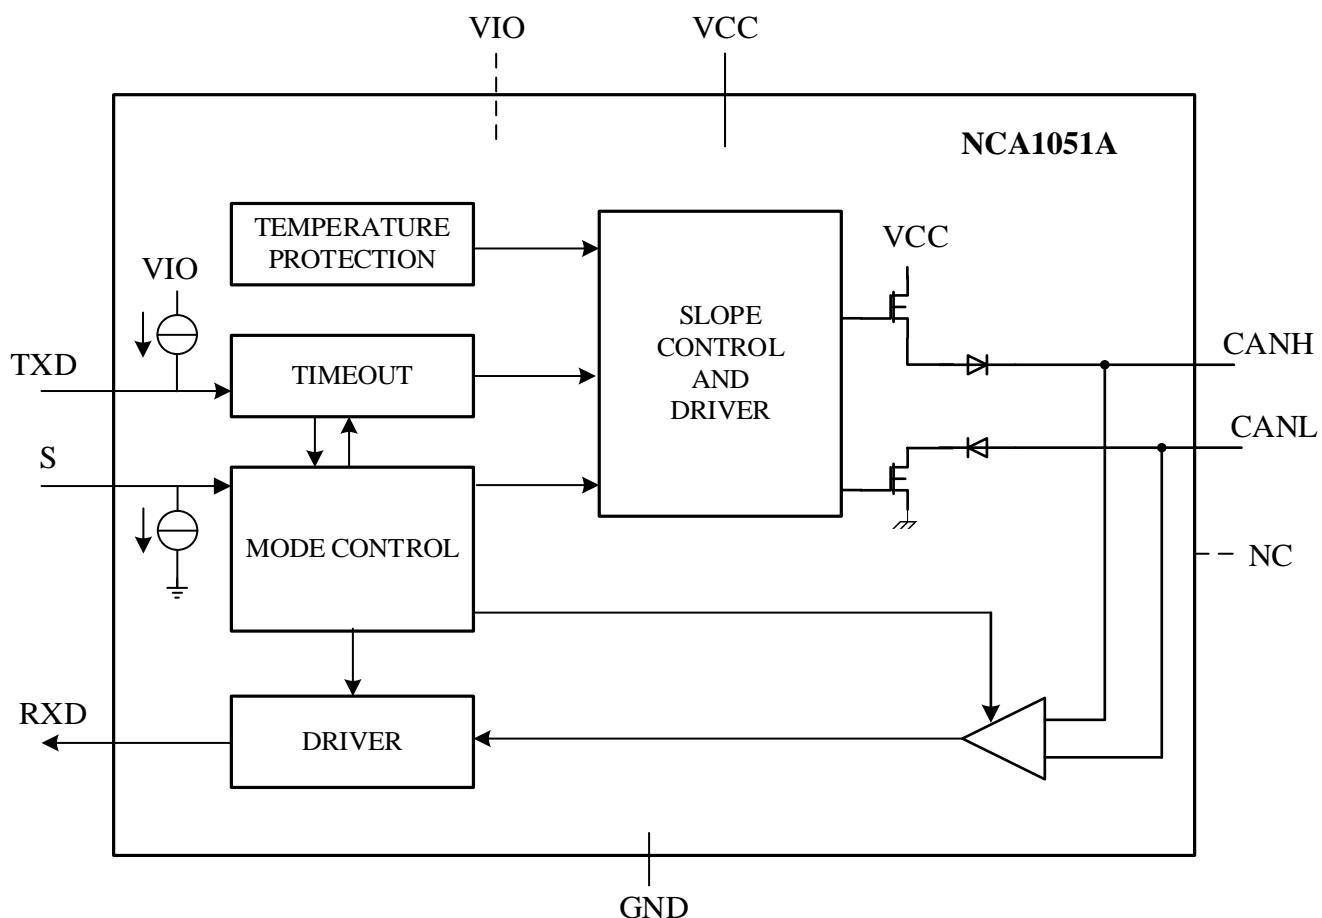


Figure 7-1 Block diagram of NCA1051A

7.3. Feature Description

7.3.1. TXD Dominant Time-Out Function (TXD DTO)

A ‘TXD dominant time-out’ timer circuit prevents the bus lines from being driven to a permanent dominant state (blocking all network communication) if pin TXD is forced permanently LOW by a hardware and/or software application failure. The timer is triggered by a negative edge on pin TXD.

If the duration of the LOW level on pin TXD exceeds the internal timer value (t_{TXD_DTO}), the transmitter is disabled, driving the bus lines into a recessive state. The timer is reset by a positive edge on pin TXD. The TXD dominant time-out time also defines the minimum possible bit rate of 10 kbit/s.

7.3.2.Undervoltage Detection on Pins VCC and VIO

The supply terminals have undervoltage detection that places the device in protected mode. This protects the bus during an undervoltage event on either the VCC or VIO supply terminals.

After an undervoltage condition is cleared and the supplies have returned to valid levels, the device typically resumes normal operation within 50 μ s.

Table 7-1 Undervoltage Lockout 5V Only Devices (NCA1051AN)

VCC	Device State	Bus Output	RXD
>UV _{VCC}	Normal	Per TXD	Mirrors Bus ^[1]
<UV _{VCC}	Protected	High Impedance	High Impedance

^[1] Mirrors bus state: low if CAN bus is dominant, high if CAN bus is recessive.

Table 7-2 Undervoltage Lockout I/O Level Shifting Devices (NCA1051A)

VCC	VIO	Device State	Bus Output	RXD
>UV _{VCC}	>UV _{VIO}	Normal	Per TXD	Mirrors Bus ^[1]
<UV _{VCC}	>UV _{VIO}	Protected	High Impedance	High (Recessive)
>UV _{VCC}	<UV _{VIO}	Protected	High Impedance	High Impedance
<UV _{VCC}	<UV _{VIO}	Protected	High Impedance	High Impedance

^[1] Mirrors bus state: low if CAN bus is dominant, high if CAN bus is recessive.

7.3.3.Unpowered Device

The device is designed to be 'ideal passive' or 'no load' to the CAN bus if it is unpowered. The bus terminals (CANH, CANL) have extremely low leakage currents when the device is unpowered to avoid loading down the bus. This is critical if some nodes of the network are unpowered while the rest of the network remains in operation. The logic terminals also have extremely low leakage currents when the device is unpowered to avoid loading down other circuits that may remain powered.

7.3.4.Internal Biasing of TXD and S Input Pins

Pin TXD has an internal pull-up to VIO, and pin S has an internal pull-down to GND. This ensures a safe, defined state in case one or both of these pins are left floating.

7.3.5.Over-Temperature Protection (OTP)

The output drivers are protected against over-temperature conditions. If the virtual junction temperature exceeds the shutdown junction temperature T_{SD} , the output drivers will be disabled until the virtual junction temperature becomes lower than T_{SD} and TXD becomes recessive again. By including the TXD condition, the occurrence of output driver oscillation due to temperature drifts is avoided.

7.3.6.Over-Current Protection (OCP)

A current-limiting circuit protects the transmitter output stage from damage caused by accidental short-circuit to either positive or negative supply voltage, although power dissipation increases during this fault condition.

7.4. VIO Supply Pin

Two versions of the NCA1051A are available, only differing in the function of a single pin. Pin 5 is either a VIO supply pin or is not connected (NC).

Pin VIO should be connected to the microcontroller supply voltage (see Figure 8-1). This will adjust the signal levels of pins TXD, RXD and S to the I/O levels of the microcontroller. For versions of the NCA1051AN without a VIO pin, the VIO input is internally connected to VCC. This sets the signal levels of pins TXD, RXD and S to levels compatible with 5 V microcontrollers.

7.5. Device Functional Modes

The device has two main operating modes: Normal mode and Silent mode. Operating mode is selected via the S input pin.

Table 7-3 Operating Modes

S	Mode	Driver	Receiver	RXD Terminal
L	Normal Mode	Enabled (ON)	Enabled (ON)	Mirrors Bus State ¹
H	Silent Mode	Disabled (OFF)	Enabled (ON)	Mirrors Bus State ¹

¹ Mirrors bus state: low if CAN bus is dominant, high if CAN bus is recessive.

7.5.1. CAN Bus States

The CAN bus has two states during powered operation: dominant and recessive. A dominant bus state is when the bus is driven differentially, corresponding to a logic LOW on the TXD and RXD terminal. A recessive bus state is when the bus is biased to $V_{cc}/2$ via the high-resistance internal input resistors R_i of the receiver, corresponding to a logic HIGH on the TXD and RXD terminals.

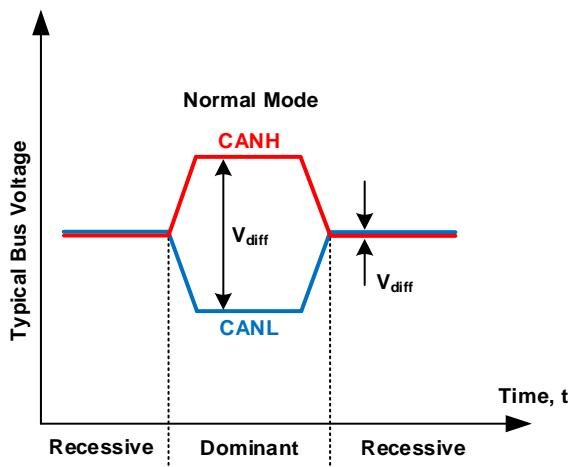


Figure 7-2 Bus States

7.5.2. Normal Mode

A LOW level on pin S selects Normal mode. In this mode, the transceiver can transmit and receive data via the bus lines CANH and CANL (see Figure 7-1). The differential receiver converts the analog data on the bus lines into digital data which is output to pin RXD. The slopes of the output signals on the bus lines are controlled internally and are optimized in a way that guarantees the lowest possible Electromagnetic Emission (EME).

7.5.3. Silent Mode

A HIGH level on pin S selects Silent mode. In Silent mode, the transmitter is disabled, releasing the bus pins to recessive state. All other IC functions, including the receiver, continue to operate as in Normal mode. Silent mode can be used to prevent a faulty CAN controller from disrupting all network communications.

7.5.4. Driver and Receiver Function Tables

Table 7-4 Driver Function Table

Inputs		Outputs		Driven Bus State
S ^[1]	TXD ^{[1] [2]}	CANH ^[1]	CANL ^[1]	
L or Open	L	H	L	Dominant
	H or Open	Z	Z	Recessive
H	X	Z	Z	Recessive

^[1] H= high level; L=low level; X=irrelevant; Z= common mode(recessive) bias to V_{CC}/2.

^[2] Devices have an internal pull up to VCC or VIO on TXD terminal. If the TXD terminal is open, the terminal is pulled HIGH and the transmitter remain in recessive (non-driven) state.

Table 7-5 Receiver Function Table

Device Mode	CAN Differential Inputs $V_{ID} = V_{CANH} - V_{CANL}$	Bus State	RXD Terminal ^[1]
Normal or Silent	$V_{ID} \geq V_{ID(D)}$	Dominant	L
	$V_{ID(R)} < V_{ID} < V_{ID(D)}$	Uncertain	Uncertain
	$V_{ID} \leq V_{ID(R)}$	Recessive	H
	Open	Open	H

^[1] H= high level; L=low level.

8. Application Information

8.1. Typical Application

The NCA1051A requires a 0.1 μF bypass capacitors between VCC and GND. The capacitor should be placed as close as possible to the package. The Figure 8-1 and Figure 8-2 are the typical applications of NCA1051A.

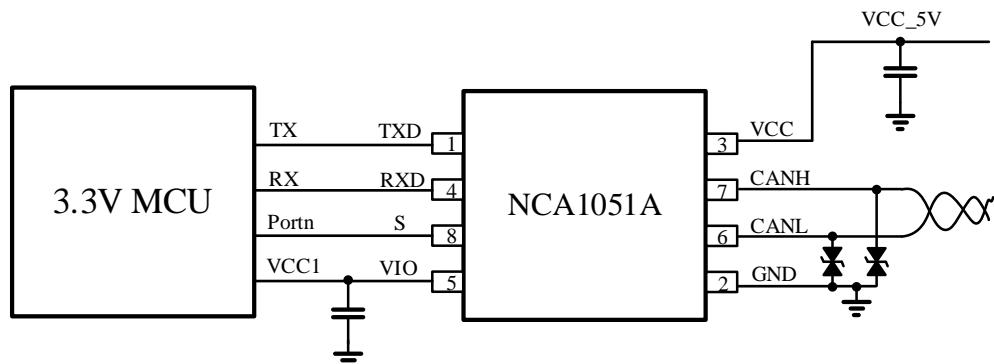


Figure 8-1 Typical CAN Bus Application Using 3.3V CAN Controller

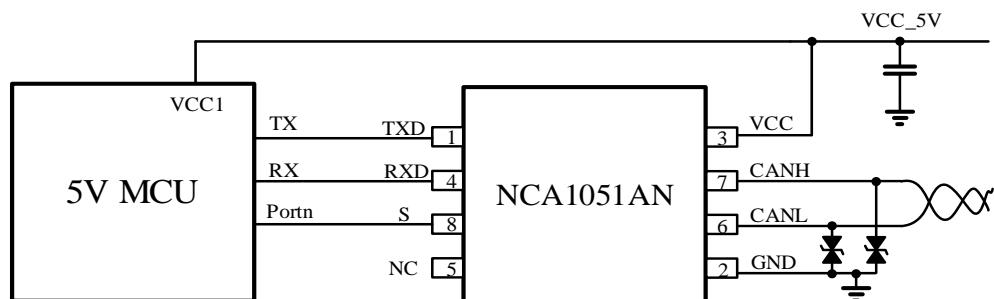


Figure 8-2 Typical CAN Bus Application Using 5V CAN Controller

9. Package Information

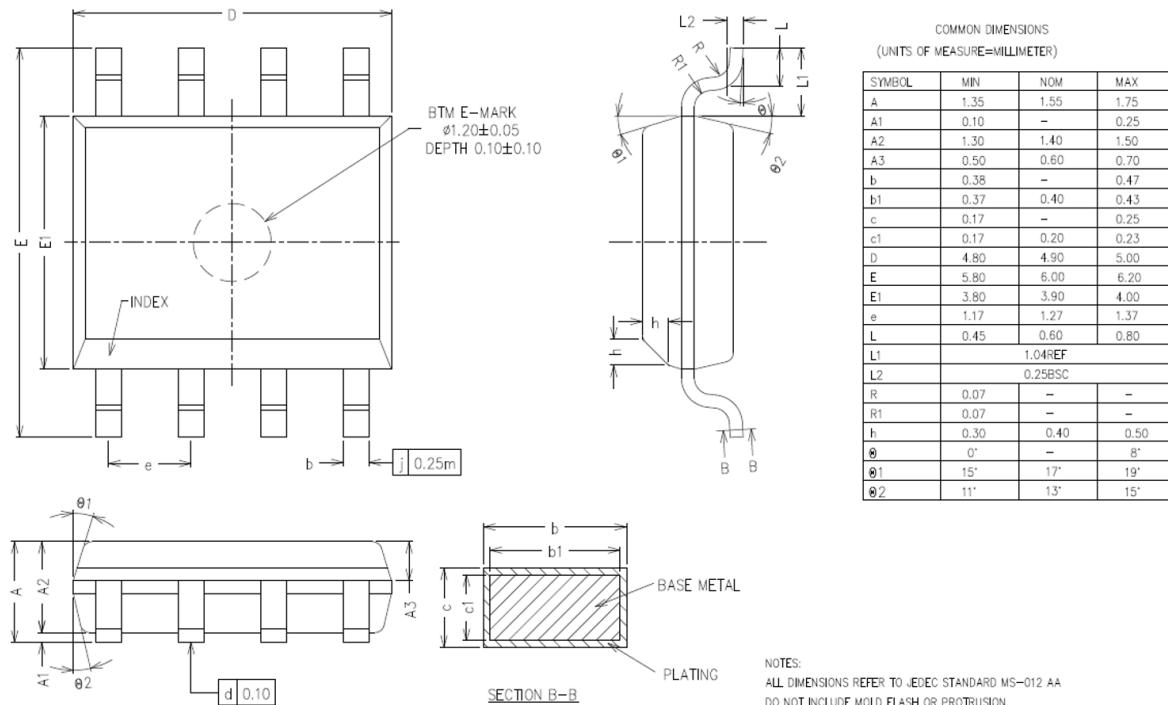


Figure 9-1 SOP8 Package Shape and Dimension

10. Order Information


Part Number	Max Data Rate (Mbps)	Operation Temperature	MSL	Package Type	Package Drawing	SPQ
NCA1051A-DSPR	5	-40 to 125°C	1	SOP8	SOP8	2500
NCA1051AN-DSPR	5	-40 to 125°C	1	SOP8	SOP8	2500

NOTE: All packages are RoHS-compliant with peak reflow temperatures of 260 °C according to the JEDEC industry standard classifications and peak solder temperatures.

11. Documentation Support

Part Number	Product Folder	Datasheet	Technical Documents
NCA1051A	Click here	Click here	Click here

12. Tape and Reel Information

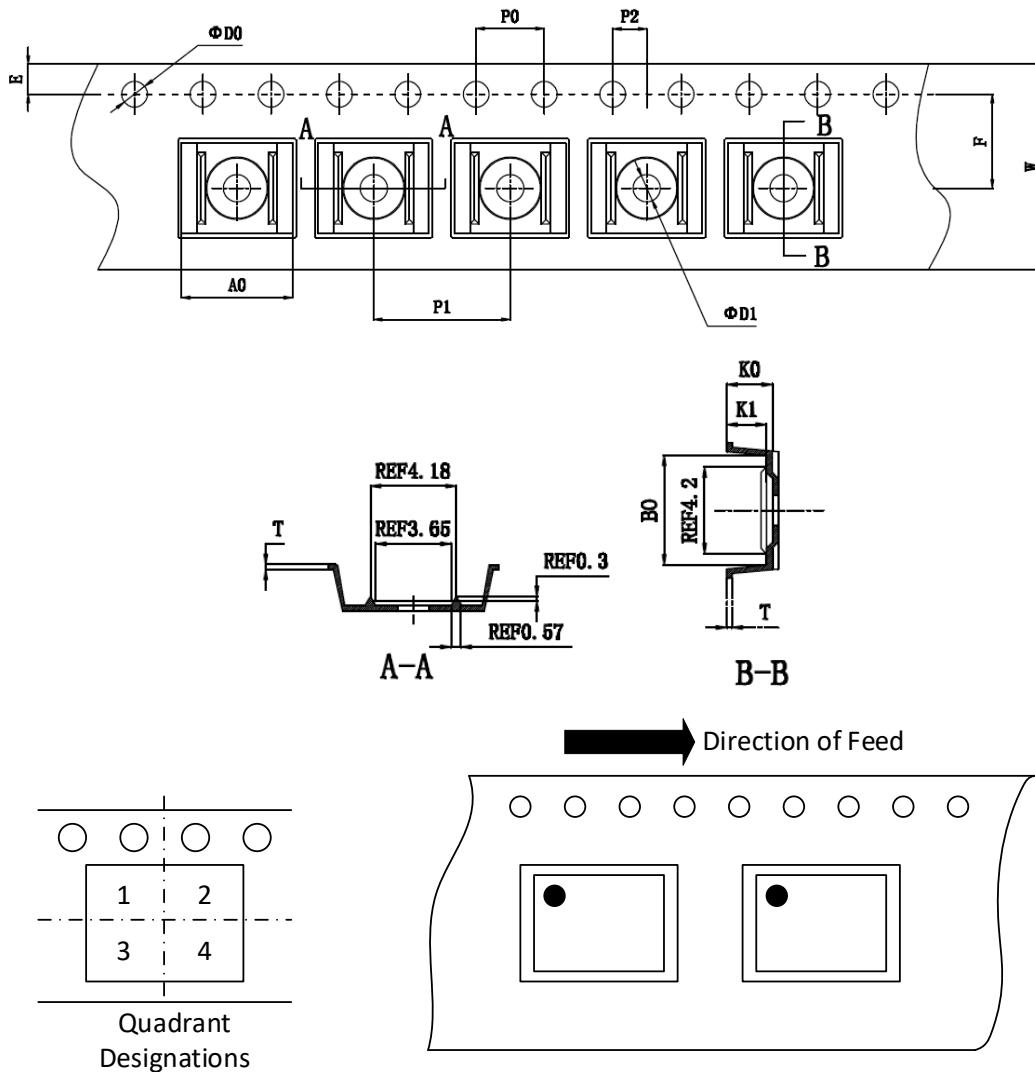

Parameter	Dimension (mm)
E	1.75 ± 0.10
F	5.5 ± 0.10
P2	2.00 ± 0.10
D0	1.55 ± 0.05
D1	1.6 ± 0.10
P0	4.00 ± 0.10
10P0	40.00 ± 0.20

Parameter	Dimension (mm)
W	12.00 ± 0.30
P1	8.00 ± 0.10
A0	6.50 ± 0.10
B0	5.30 ± 0.10
K0	2.20 ± 0.10
K1	1.90 ± 0.10
T	0.30 ± 0.05

Figure 12-1 Tape and Reel Information of SOP8

13. Revision History

Revision	Description	Date
1.0	Initial version	2023/8/3
1.1	One-page information update; figure update; table format update; function description update	2023/8/25

IMPORTANT NOTICE

The information given in this document (the “Document”) shall in no event be regarded as any warranty or authorization of, express or implied, including but not limited to accuracy, completeness, merchantability, fitness for a particular purpose or infringement of any third party’s intellectual property rights.

Users of this Document shall be solely responsible for the use of NOVOSENSE’s products and applications, and for the safety thereof. Users shall comply with all laws, regulations and requirements related to NOVOSENSE’s products and applications, although information or support related to any application may still be provided by NOVOSENSE.

This Document is provided on an “AS-IS” basis and is intended only for skilled developers designing with NOVOSENSE’ products. NOVOSENSE reserves the rights to make corrections, modifications, enhancements, improvements or other changes to the products and services provided without notice. NOVOSENSE authorizes users to use this Document exclusively for the development of relevant applications or systems designed to integrate NOVOSENSE’s products. No license to any intellectual property rights of NOVOSENSE is granted by implication or otherwise. Using this Document for any other purpose, or any unauthorized reproduction or display of this Document is strictly prohibited. In no event shall NOVOSENSE be liable for any claims, damages, costs, losses or liabilities arising out of or in connection with this Document or the use of this Document.

For further information on applications, products and technologies, please contact NOVOSENSE (www.novosns.com).

Suzhou NOVOSENSE Microelectronics Co., Ltd